

SL ARCHITECT 4-2 MKII

The Architect 4-2 MKII is a high-performance in-ceiling loudspeaker designed for Dolby Atmos, DTS:X and Auro-3D applications, combining controlled directivity, high output and exceptional intelligibility in an ultra-shallow architectural design. Using an angled driver array for precise coverage and improved localisation, it is ideal for immersive audio systems where space, installation simplicity and seamless integration are essential.

Frequency range 100 Hz to 20 kHz

Usable LF response 97 Hz (-6 dB)

Coverage window Horizontal 90°, Vertical 45°

Sensitivity @ 1 Watt 98 dB

Power handling 120 Watt

Maximum continuous SPL @ 1 meter 114 dB

Maximum acoustic peak SPL crest factor 6 @ 1 meter 120 dB

Rated Impedance 4 Ohms

Weight: 2.9 kg

Dimensions: H: 300 W: 300 D: 73 mm


Cabinet: Black, White, RAL/NCS Colours.

Screen: Black, White, RAL/NCS Colours.



SCHEMATICS

dimensions are in mm

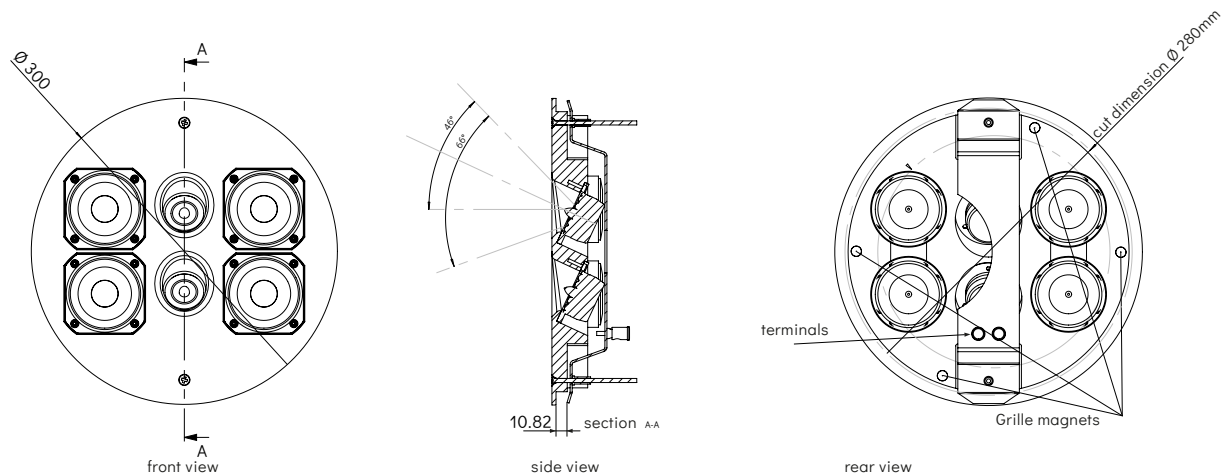

POLAR RESPONSE

