

SL HSPL SOUNDBAR

SL Multi Soundbar high sound pressure level version.
This Soundbar version has been specially designed and Engineered for application where very high sound pressure levels are required, matching the larger Artcoustic speaker models, such as the 12-6, 16-8 and 24-12 SL models

Frequency range 80 Hz to 40 kHz

Usable LF response 77 Hz (-6 dB)

Coverage window Horizontal 70°, Vertical 90°

Sensitivity @ 1 Watt 98 dB (per channel)

Power handling 120 Watt (per channel)

Maximum continuous SPL @ 1 meter 110 dB (per channel)

Maximum acoustic peak SPL crest factor 6 @ 1 meter 116 dB (per channel)

Rated Impedance 8 Ohms (per channel)

Weight: Bespoke kg

Dimensions: H: 100 W: Bespoke D: 82 mm


Cabinet: Black, White, RAL/NCS Colours.

Screen: Black, White, RAL/NCS Colours.



SCHEMATICS

dimensions are in mm

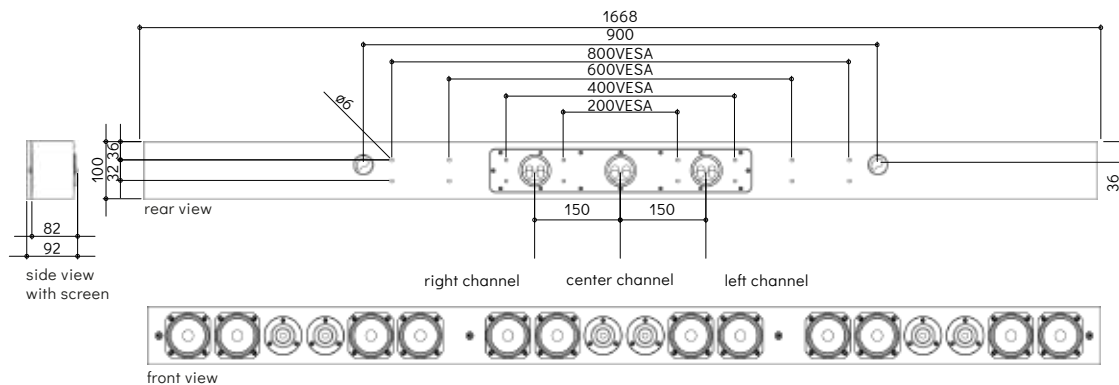

POLAR RESPONSE

