

SPITFIRE CLOUD

The Artcoustic Spitfire Cloud has been developed specifically for immersive audio applications where performance, coverage control and ease of installation are equally important.

Designed as a dedicated in-ceiling loudspeaker for Dolby Atmos, DTS:X and Auro-3D systems, the Spitfire Cloud combines high output capability, controlled directivity and exceptional speech intelligibility within an ultra-shallow architectural form factor.

Frequency range 100 Hz to 20 kHz

Usable LF response 97 Hz (-6 dB)

Coverage window Horizontal 90°, Vertical 45°

Sensitivity @ 1 Watt 98 dB

Power handling 120 Watt

Maximum continuous SPL @ 1 meter 114 dB

Maximum acoustic peak SPL crest factor 6 @ 1 meter 120 dB

Rated Impedance 4 Ohms

Weight: 3 kg

Dimensions: H: 300 W: 300 D: 73 mm


Cabinet: Black, RAL/NCS Colours.

Screen: Black, White, RAL/NCS Colours.



SCHEMATICS

dimensions are in mm

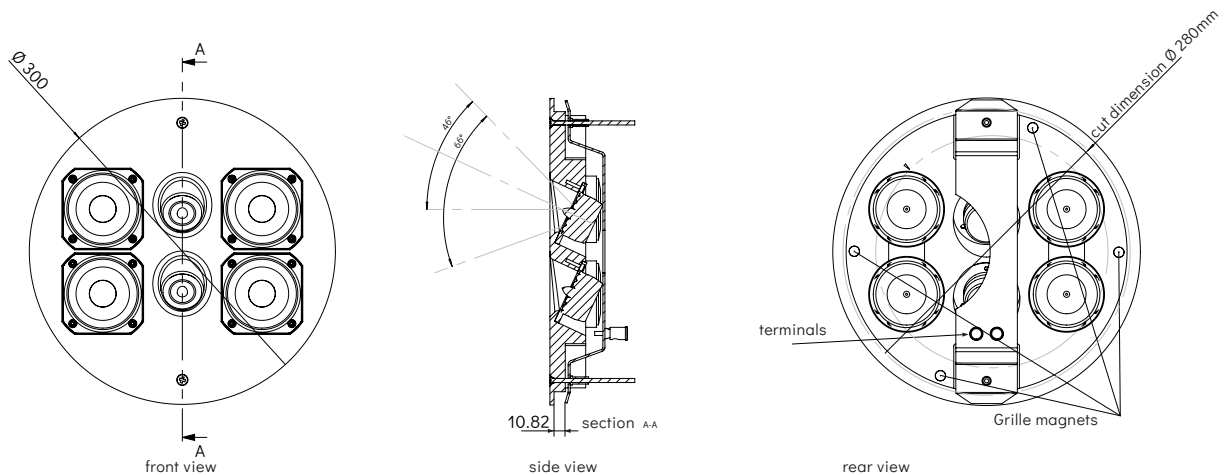

POLAR RESPONSE

