

## SUB CI4-5 MKII SUBWOOFER

The Artcoustic Sub Ci4-5 MKII features four 5¼-inch long-throw woofers, paired with Artcoustic's in-house designed 1st order high-bandwidth sealed cabinet technology. This combination ensures precise low-frequency reproduction, high power handling, and exceptionally low distortion.



The Sub Ci4-5 MKII is perfect for installations where space and aesthetics are key. An optional oversized baffle allows for seamless in-wall integration, blending effortlessly into any interior.



Frequency range 40 Hz to 170 Hz  
 Usable LF response 37 Hz (-6 dB)  
 Coverage window Omni-directional  
 Sensitivity @ 1 Watt 90 dB  
 Power handling 400 Watt @ 56 Vrms  
 Maximum continuous SPL @ 1 meter 114 dB, power drawn 220 W 42 Vrms  
 Maximum acoustic peak SPL crest factor 6 @ 1 meter 120 dB  
 Rated Impedance 8 Ohms  
 Weight: 10.2 kg  
 Dimensions (without baffle): H: 145 W: 1000 D: 99 mm  
 Dimensions (with baffle): H: 185 W: 1020 D: 111 mm  
 Cabinet: Black SL, White SL, Optional RAL and NCS


## SCHEMATICS

dimensions are in mm

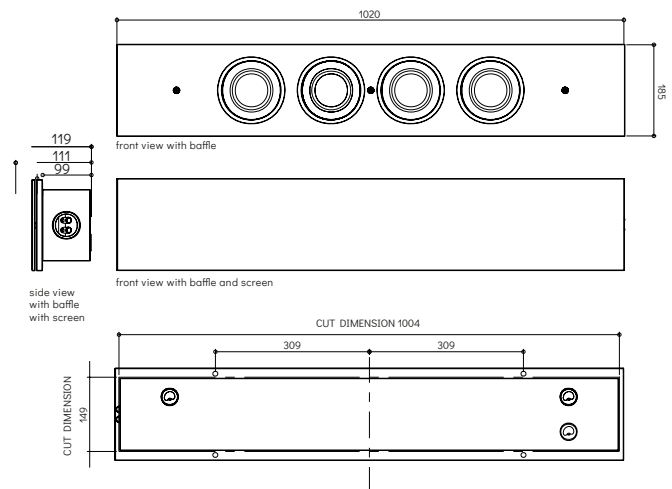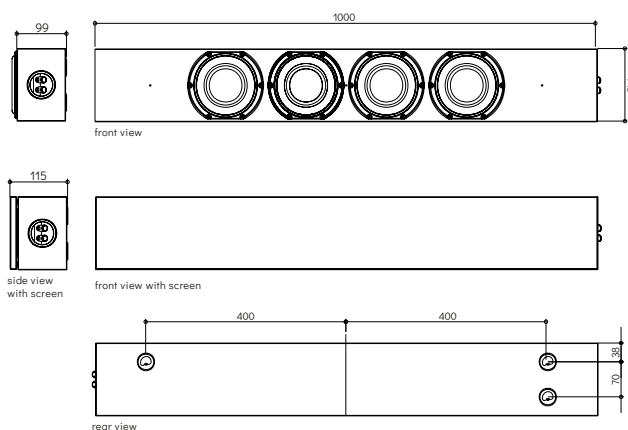


## INSTALLATION

1

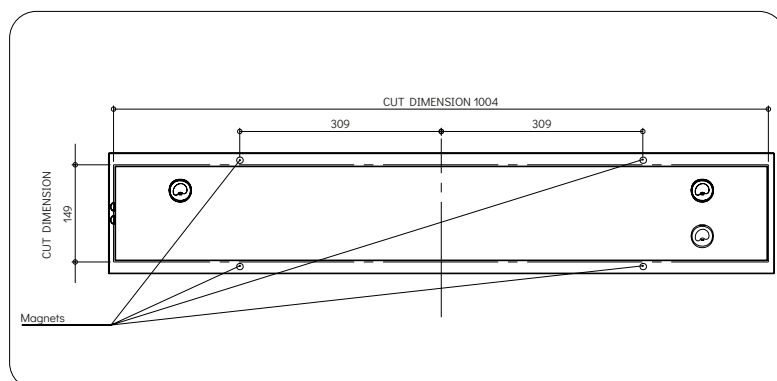

Cut the hole in the wall according to the template, carefully mark the wall cut out and the fitting bracket position. For horizontal studs, keep a minimum distance of 30mm.

2

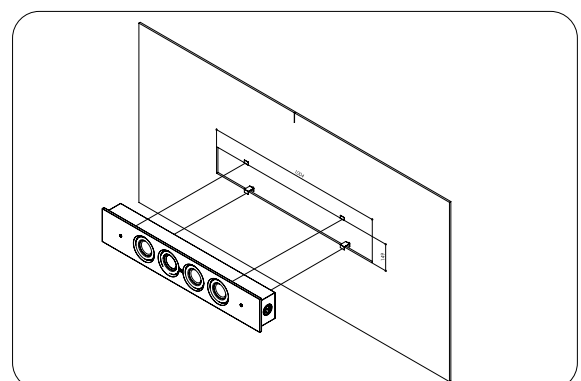

Fit Ci4-5 Subwoofer MKII in the cutout until magnets have contact with the four fixing brackets